



Cuttack Central Co-operative Bank Ltd.
Head Office, Nimchouri, Cuttack – 753002

No. 4948

Email : ccbho@cuttackccb.co.in

Dt. 17-11-2025

SHORT TENDER CALL NOTICE

Sealed Tenderers are invited from Experience contractors for Construction of Gate at Erasama Branch of Cuttack Central Cooperative Bank Ltd., Cuttack-753002. The Tenderers shall collect the detailed documents of the work available in our Bank Website www.cuttackccb.bank.in.

Sl No.	Name of the work	Estimate tender amount excluding GST(Rs)	Period of completion	Remark
1.	Construction of Gate of Cuttack CCB at Erasama Branch	3,08,625.00	90 days	

Terms and Conditions

1. Bid shall contain copy of, PAN Card, GST Certificate, IT Return of last 3 financial year- 2022-2023, 2023-2024, 2024-2025.
2. Price Bid shall contain the filled up documents in proper manner.
3. The sealed envelope shall be put in a sealed cover, super-scribed with Tender for ' Construction of Gate at Erasama Branch of Cuttack Central Cooperative Bank Ltd.
4. The Tender papers will be submitted at Head office of the Bank at Nimchouri, Cuttack-753002 from Dt. 17.11.2025 to 29.11.2025 upto 3.00Pm and it will be opened on Dt.01.12.2025 at 4.00pm in presence of Tenderer of their authorized representative at Cuttack CCB Head office, Nimchouri, Cuttack-753002.
5. 5% of the final bill will be kept as Security Deposit, which will be released after 12 months of the completion of work.
6. Authority is not bound to accept the lowest Tender and reserves the right to cancel or reject any or all Tenders without assigning any reason thereof.

Chief Executive Officer
Cuttack Central Co-operative Bank Ltd.
Memo No. 4949 / Dt. 17-11-2025

1. Copy to Notice Board of Cuttack CCB Head Office, Erasama Branch & upload in our Bank Website i.e www.cuttackccb.bank.in

Chief Executive Officer
Cuttack Central Co-operative Bank Ltd.
Memo No. 4950 / Dt. 17-11-2025

Copy communicated to the president, for your kind information.

Chief Executive Officer
Cuttack Central Co-operative Bank Ltd.
Cuttack



DETAILED ESTIMATE

CONSTRUCTION OF GATE OF CUTTACK CENTRAL CO-OPERATIVE BANK AT ERSAMA

						ESTIMATED COST:-			
	DESCRIPTION	NO.	L	B	H	QTY.	UNIT	RATE	AMOUNT
1	Earth work excavation in foundation in hard soil with initial lead & lift including rough dressing levelling etc. complete.								
	<u>GATE NO.01</u>								
	COLUMN FOUNDATION								
	S/W	2	1.50	1.50	1.80	8.10	CUM		
	GRADE BEAM FOUNDATION								
		1	2.95	0.75	0.60	1.33	CUM		
					TOTAL	9.43	CUM		
2	Filling in foundation & Plinth with sand well watered and rammed etc. Complete.								
	<u>GATE NO.01</u>								
	COLUMN FOUNDATION								
	COLUMN	2	1.50	1.50	0.15	0.68	CUM		
	GRADE BEAM FOUNDATION								
		1	2.95	0.75	0.15	0.33	CUM		
					NET	1.01	CUM		
3	P.C.C(1:3:6) using 40mm size C.B.H.G.metal with cost, Conveyance , royalty,taxes of all material and labour,T & P etc.Complete. Per one cum								
	<u>GATE NO.01</u>								
	COLUMN FOUNDATION								
	COLUMN	2	1.50	1.50	0.15	0.68	CUM		
	GRADE BEAM FOUNDATION								
		1	2.95	0.75	0.15	0.33	CUM		
					NET	1.01	CUM		
4	Rigid smooth centering and shuttering for RCC work etc. Complete.								
A	FOR COLUMN BASE								
	GATE NO. 01	8	1.20		0.45	4.32	SQM		
					TOTAL	4.32	SQM		

[Handwritten Signature]
18/11/25



**B FOR COLUMN
GATE NO. 01**

BOTTOM OF PLINTH BEAM	4	0.60	0.75	1.80	SQM
	4	0.45	0.75	1.35	SQM
PLINTH BEAM TOP TO ROOF BEAM BOTTOM	4	0.60	4.30	10.32	SQM
	4	0.45	4.30	7.74	SQM

GR TOTAL 21.21 SQM

**C FOR GRADE
BEAM**

GATE NO. 01	2	4.45	0.30	2.67	SQM
	2	0.45	0.30	0.27	SQM
TOTAL			2.94	SQM	

**D FOR ROOF
BEAM**

GATE NO. 01	2	5.65	0.600	6.78	SQM
	2	0.45	0.600	0.54	SQM
	1	3.85	0.450	1.73	SQM
	2	0.30	0.450	0.27	SQM
TOTAL			9.32	SQM	

5 Labour for cutting, bending and binding of steel including cost and conveyance of steel etc. Complete.

GATE NO. 01 OR 6.08 QTL

6 R.C.C work of M20 grade using 20mm and down graded black CBHG stone chips including hosting and laying etc complete.

**A COLUMN BASE
GATE NO. 01**

RECTANGULAR PORTION	2	1.20	1.20	0.45	1.30	CUM
TOTAL				1.30	CUM	

Handwritten signature and date 12/11/21



**B COLUMN
GATE NO. 01**

BOTTOM OF
GRADE BEAM 2 0.60 0.45 0.75 0.41 CUM

GRADE BEAM
TOP TO BEAM
BOTTOM 2 0.60 0.45 4.30 2.32 CUM

TOTAL 2.73 CUM

C GRADE BEAM

GATE NO. 01 1 3.85 0.45 0.30 0.52 CUM

TOTAL 0.52 CUM

D ROOF BEAM

GATE NO. 01 1 5.65 0.45 0.60 1.53 CUM

TOTAL 1.53 CUM

**GR.
TOTAL 6.08 CUM**

- 7 Masonry work with Flyash Bricks having crushing strength between 75kg/sq.cm
with dimensional tolerance ± 8 percent in c.m. 1:6 in super structure including cost
conveyance of materials curing etc. complete.

GATE NO. 01

ABOVE ROOF
BEAM 1 5.65 0.45 0.30 0.76 CUM

ARCH PORTION 1/2X0.60X2.65 0.45 0.35 CUM

TOTAL 1.11 CUM

- 8 12mm Cement Plaster (1:6) for Brick work Incl.all charges (Per Sqm)

GATE NO. 01 4 2.10 4.30 36.12 SQM

1 3.85 0.45 1.73 SQM

2 0.30 0.45 0.27 SQM

2 5.65 0.60 6.78 SQM

2 0.45 0.60 0.54 SQM

2 5.65 0.30 3.39 SQM

2 1/2X0.60X2.65 1.59 SQM

1 6.65 0.45 2.99 SQM

TOTAL 53.41 SQM

Handwritten signature and date 12/11/21



- 9 Priming one coat with water based wall primer etc complete
GATE NO. 01

Area= As per Item No.

53.41 SQM

8

- 10 Finishing walls with water proofing weather coat of approved shade on new work
2 coats to give an even shade etc. Complete.

GATE NO. 01

Area= As per Item No.

53.41 SQM

8

- 11 Provision for supplying fitting and fixing of Steel Gate including cost, gst,
conveyance and fabrication charges etc. complete

GATE NO. 01 1 3.85 2.10

8.09 SQM

TOTAL 8.09 SQM

OR 87.08 SQFT

TOTAL


Adding
CGST@9%

Adding
SGST@9%

GRAND TOTAL

(Rupees) only

Accepted
12/11/25

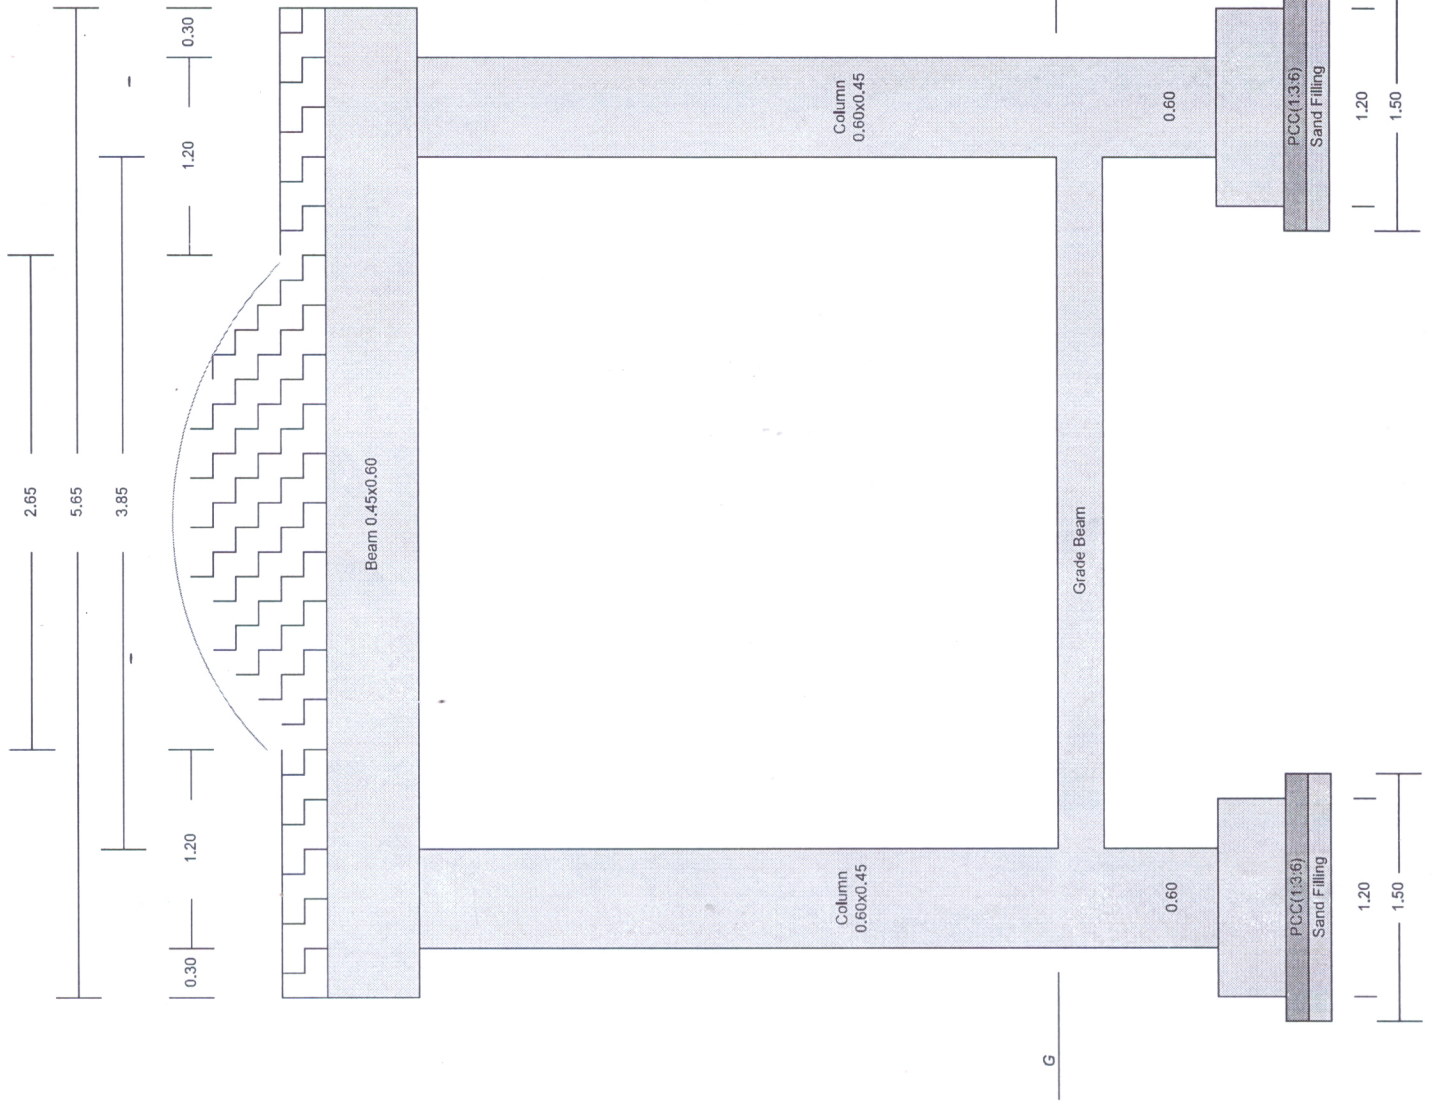

Handwritten signature and date: 1.11.13