



## Cuttack Central Co-operative Bank Ltd.

Head Office, Nimchouri, Cuttack – 753002

Email : ccbho@cuttackccb.co.in

No. 2003

Dt. 08/9/26

### SHORT TENDER CALL NOTICE

1. The Cuttack Central Cooperative Bank Ltd., Cuttack, invites percentage rate bids in Double Cover system in online mode for the works in the table below from the interested "D Class" contractors registered with State Government/ Central Government / PSU Undertaking or Organization for "Renovation of Society Building and Sanitary Complex at Head Office of Cuttack Central Cooperative Bank Ltd". The Bidders may collect the detailed documents of the work which is available in Bank's Website ([www.cuttackccb.bank.in](http://www.cuttackccb.bank.in)).
2. The Bidders may submit bids for the following works.

| Sl No | Name of the work                                                                  | Approx. value of work (in Rs) Inc. all Taxes | Bid Security (in Rs) (EMD) | Cost of Bid Document | Class of Contract or | Period of completion | Cover System |
|-------|-----------------------------------------------------------------------------------|----------------------------------------------|----------------------------|----------------------|----------------------|----------------------|--------------|
| 1     | 2                                                                                 | 3                                            | 4                          | 5                    | 6                    | 7                    | 8            |
|       | Renovation of Society Building and Sanitary Complex at Head Office of Cuttack CCB | 3,38,000.00                                  | 3,380.00                   | 2000.00              | "D"                  | 6 months             | Double       |

3. Bid shall contain copy of PAN Card, GST Certificate, IT Return of last 3 Financial year- 2023-2024, 2024-2025, 2025-2026.
4. The Contractor should not be blacklisted from any State Government/ Central Government / PSU Undertaking or Organization.
5. Work Experience Certificate from appropriate Authority having experience not less than 5 years in the Concerned Field.
6. Price Bid shall contain the filled up documents in proper manner.
7. The sealed envelope shall be put in a sealed cover, super-scribed with Tender for "Renovation of Society Building and Sanitary Complex at Head Office of Cuttack Central Cooperative Bank Ltd".
8. The Tender papers will be submitted at Head office of the Bank at Nimchouri, Cuttack-753002 from Dt.08.09.2026 to 24.09.2026 (upto 3.00PM) and the same opened on Dt.24.09.2026 at 4.00PM in presence of Bidders or their authorized representative at Conference Hall of Cuttack CCB Head office, Nimchouri, Cuttack-753002.
9. The submission must adhere to the Two-Bid System with sealed envelopes: Envelope 1 (Technical Bid), which must enclose all mandatory documents and Envelope 2 (Price Bid), which must contain only the price quotation. The Bidder(s) failed to qualify the Technical Bid, their Price Bid will not be opened / entertained.
10. The quotation envelope must also contain a copy of the Bank Challan of Rs. 2000/- as the non-refundable Tender Cost, and the original Demand Draft (DD) for 1% of the Tender Amount as the Refundable Earnest Money Deposit (EMD)

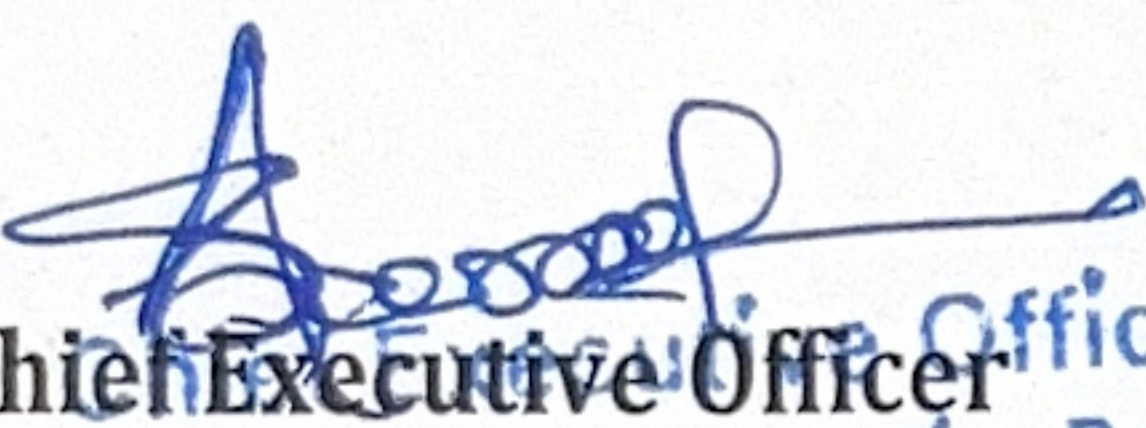


11. This DD must be a fresh DD drawn in favor of "Cuttack Central Co-operative Bank Ltd." (No old DDs will be adjusted). The EMD for unsuccessful bidders will be refunded soon after the finalization of the tender process, and the successful bidder's EMD will be refunded after the successful completion of the work. Any quotation submitted without the required Tender Cost and Earnest Money Deposit (EMD) will be summarily rejected.
12. 5% of the final bill amount shall be retained as a Security Deposit and shall be released after the completion of 12 months from the date of completion of the work or after completion of the audit for the relevant financial year.
13. Authority is not bound to accept the lowest Tender and reserves the right to cancel or reject any or all Tenders without assigning any reason thereof.

  
Chief Executive Officer

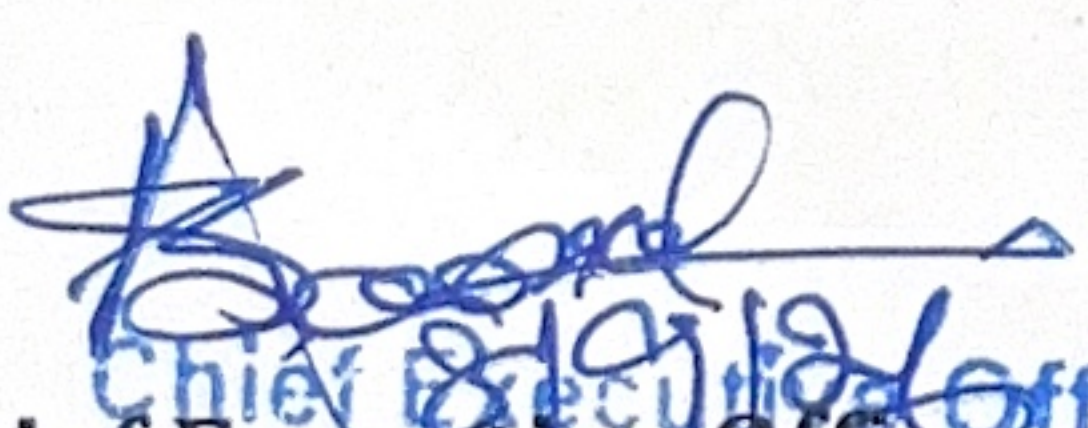
Memo No. 2004/ Dt. 8/9/20  
Cuttack Central Co-operative Bank Ltd.  
Cuttack

1. Copy to file for Record
2. Notice Board of Cuttack Central Cooperative Bank Ltd. Head Office,
3. All Branch Managers of Cuttack Central Cooperative Bank Ltd for information with a request to display in the Notice Board.
4. Premises Officer, Cuttack CCB Ltd., HO for information with request to publish this Notice in premier Odia Daily Newspaper for wide Circulation.
5. System In-Charge of Computer Cell, HO for information with a request to upload the notice on the Bank's Website i.e [www.cuttackccb.bank.in](http://www.cuttackccb.bank.in) for wide circulation.

  
Chief Executive Officer

Memo No. 2005/ Dt. 8/9/20  
Cuttack Central Co-operative Bank Ltd.  
Cuttack

Copy Submitted to the President, Cuttack Central Cooperative Bank Ltd., for kind information and necessary action.

  
Chief Executive Officer  
Cuttack Central Co-operative Bank Ltd.  
Cuttack



# **GOVERNMENT OF ODISHA**

## **PANCHAYATI RAJ DEPARTMENT**

**D.R.D.A. CUTTACK**

**PANCHAYAT SAMITI, CUTTACK SADAR**

NAME OF THE WORK :-- **RENOVATION OF SOCEITY BUILDING  
AND SANITARY COMPLEX OF CUTTACK  
CENTRAL CO-OPERATIVE BANK.**

**Name of the scheme-**

**Estimated cost -**

**Financial Year - 25/26**

**Name of the Place- CUTTACK**

**DETAILED ESTIMATE FOR**  
**RENOVATION OF SOCEITY BUILDING AND SANITARY COMPLEX OF CUTTACK CENTRAL CO-  
 OPERATIVE BANK.**

| GP:- | CUTTACK                                                                                                                                                                                    |     |       |      | ESTIMATED COST:- |        |      |       | *****  |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-------|------|------------------|--------|------|-------|--------|
|      | DESCRIPTION                                                                                                                                                                                | NO. | L     | B    | H                | QTY.   | UNIT | RATE  | AMOUNT |
| 1    | Earth work excavation in foundation in hard soil with initial lead & lift including rough dressing levelling etc. complete.                                                                |     |       |      |                  |        |      |       |        |
|      | FOUNDATION                                                                                                                                                                                 |     |       |      |                  |        |      |       |        |
|      | L/W                                                                                                                                                                                        | 2   | 26.75 | 2    | 2                | 214.00 | CFT  |       |        |
|      | S/W                                                                                                                                                                                        | 2   | 13.50 | 2    | 2                | 108.00 | CFT  |       |        |
|      | TRUSS FO.UN                                                                                                                                                                                | 8   | 3     | 3    | 3                | 216.00 | CFT  |       |        |
|      |                                                                                                                                                                                            |     |       |      | TOTAL            | 538.00 |      |       |        |
|      |                                                                                                                                                                                            |     |       |      | NET              | 15.225 | CUM  | ***** | *****  |
| 2    | Filling in foundation & Plinth with sand well watered and rammed etc. Complete.                                                                                                            |     |       |      |                  |        |      |       |        |
|      | L/W                                                                                                                                                                                        | 2   | 26.75 | 2    | 0.5              | 53.50  | CFT  |       |        |
|      | S/W                                                                                                                                                                                        | 2   | 13.50 | 2    | 0.5              | 27.00  | CFT  |       |        |
|      | TRUSS FO.UN                                                                                                                                                                                | 8   | 3     | 3    | 0.5              | 36.00  | CFT  |       |        |
|      | MIDDLE                                                                                                                                                                                     | 1   | 24.00 | 12   | 2.5              | 720.00 | CFT  |       |        |
|      |                                                                                                                                                                                            |     |       |      | TOTAL            | 836.50 | CFT  |       |        |
|      |                                                                                                                                                                                            |     |       |      | NET              | 23.673 | CUM  | ***** | *****  |
| 3    | P.C.C(1:3:6) using 40mm size C.B.H.G.metal with cost, Conveyance , royalty,taxes of all material and labour,T & P etc.Complete. Per one cum                                                |     |       |      |                  |        |      |       |        |
|      | L/W                                                                                                                                                                                        | 2   | 30.08 | 2    | 0.33             | 39.71  | CFT  |       |        |
|      | S/W                                                                                                                                                                                        | 2   | 13.50 | 2    | 0.33             | 17.82  | CFT  |       |        |
|      | TRUSS FO.UN                                                                                                                                                                                | 8   | 3     | 3    | 3                | 216.00 | CFT  |       |        |
|      | MIDDLE                                                                                                                                                                                     | 1   | 24.00 | 12   | 0.33             | 95.04  | CFT  |       |        |
|      |                                                                                                                                                                                            |     |       |      | TOTAL            | 368.57 | CFT  |       |        |
|      |                                                                                                                                                                                            |     |       |      | TOTAL            | 10.430 | CUM  | ***** | *****  |
| 4    | Fly-Ash .Brick masnory with Fly Ash Bricks of size 25cmx12cmx8cm having crushing strength not less then 75Kg/cm2 with dimensional tolerance +8 percent in C.M.(1:6) in F&P ( Rate per Cum) |     |       |      |                  |        |      |       |        |
|      | FOUNDATION                                                                                                                                                                                 |     |       |      |                  |        |      |       |        |
|      | L/W                                                                                                                                                                                        | 2   | 26.75 | 1.25 | 0.5              | 33.44  | CFT  |       |        |
|      | S/W                                                                                                                                                                                        | 2   | 13.50 | 1.25 | 0.5              | 16.88  | CFT  |       |        |



PLINTH

|     |   |       |      |     |        |     |
|-----|---|-------|------|-----|--------|-----|
| L/W | 2 | 26.75 | 1.25 | 1.5 | 100.31 | CFT |
| S/W | 4 | 13.50 | 1.25 | 1.5 | 101.25 | CFT |
| S/W | 1 | 90.00 | 0.83 | 1.5 | 112.05 | CFT |

TOTAL 363.93 CFT

TOTAL 10.299 CUM

5

Fly ash Brick Masonery in C.M (1:6) ffor Super Structure including all cost complete.

|     |   |       |      |   |       |     |
|-----|---|-------|------|---|-------|-----|
| L/W | 2 | 13.25 | 0.83 | 3 | 65.99 | CFT |
| S/W | 2 | 18.33 | 0.83 | 3 | 91.28 | CFT |

TOTAL 157.27 cft

NET 4.451 CUM

6

SUPPLYING FITTING FIXING OF VERTICAL MEMBER AND TRUSSES.

L.S.

7

R.C.C work of M20 grade using 20mm and down graded blach CBHG stone chips including hosting and laying etc complete.

KITCHEN ROOM

|      |   |       |       |      |       |
|------|---|-------|-------|------|-------|
| SLAB | 1 | 14.25 | 18.33 | 0.33 | 86.19 |
|------|---|-------|-------|------|-------|

TOTAL 86.19 CFT

TOTAL 2.439 CUM

8

Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification.

|          |       |      |       |      |
|----------|-------|------|-------|------|
| M,S, ROD | 2.739 | 0.90 | 2.500 | QTL. |
|----------|-------|------|-------|------|

9

Labour for fixing GCI Sheet in Roof

|           |   |    |       |         |
|-----------|---|----|-------|---------|
| ROOF OPEN | 1 | 27 | 14.00 | 378.000 |
|-----------|---|----|-------|---------|

35.116 SQM

10

COST OF G.CI SHEET .4mm thickness

35.116 SQM

11

G.S.T. of Sl  
No.10

18.00

12

Rigid Smooth Centering & shuttering for R.C.C.Work including false work

SLAB



|        |   |       |       |        |        |     |       |
|--------|---|-------|-------|--------|--------|-----|-------|
| BOTTAM | 1 | 13.25 | 18.75 | 248.44 | SFT    |     |       |
| SIDES  | 2 | 36.00 | 0.83  | 59.76  |        |     |       |
|        |   |       |       | TOTAL  | 308.20 | SFT |       |
|        |   |       |       |        | 28.63  | SQM | ..... |

13 COST OF ELECTRIFICATION AND SANITARY FITTINGS LABOUR AND MATERIAL .....

14 Adding Labour cess@1% .....

TOTAL .....

LIMIT .....

TECHNICALLY SANCTIONED RS .....

*[Handwritten signature]*  
8/9/26

